



meler 

## PS200 drum unloader

### For hot melt adhesives in 200L drums

'Meler' PS200 drum melters are melting and pumping systems for thermoplastic materials that directly use their drum containers (with straight sides) for capacities of up to 200L. They are designed to be used for applications that require high flow levels and speed in supplying the material to the substrate. Their main advantage is the direct use of the material's packaging itself, without the need for protective systems when using reactive polyurethanes, since basically only the material being pumped is melted. This machine has a high melting rate for three platen versions: smooth, axial platen or parallel platen, strong force cylinders and a great range of gear pumps. Long-lasting motor and pneumatic driven pressure valve assure a continuous and reliable application.

#### Gear pump

High melt capacity units and they can be supplied with different pump capacities. The gear pump allows an equal and precise glue application by a control of the glue quantity through the gear speed. Under request it is possible to supply the units with one double pump or two single pumps.

#### Multifunctional electronic control

This new development combines the electronic 'Meler' control that allows a very userfriendly handling and very effective an intuitive motor control.

#### Connections

The hose hydraulic connections to the units can be installed at the top of the melting platen over the manifold. Up to four hoses can be installed on the unit depending on type and

number of pumps used. Electric connections are placed close to the motor with a maximum of four hose connections but it can be increased, under request, two more connections on the electric cabinet for other heating devices.

#### Motor-pump

Assembly of motor-gearbox-pump guaranties an equal hot-melt supply, which is controlled by the motor rotation speed. A large number of single pump sizes (1cc to 30cc/turn) are available.

#### Compatibility

The PS200 can be equipped with Pt100 as well as with Ni120 sensor technologie. Therefore it is compatible with most of the common hot melt systems in the market.

#### Safety

The pressure relief valve ensures, that excess pressure situations are avoided in the system. It also allows to maintain a constant system pressure even in intermittent applications. Additionally the system provides a safety control by means of a bi-manual buttons to avoid mechanical entrapments while the platen is going down.

#### Air injection

When the platen is going up an air injection system is used to counteract the vacuum effect inside the drum. The system is manually control mounting a special pipe into the platen when before it goes up. Optionally this procedure can be automatically done with the suitable device under request.




## TECHNICAL CHARACTERISTICS

Drum dimensions .....	Ø571 (inner diameter) x 950 (up to 200kg)
Type of melting platen .....	Smooth, axial platen or parallel platen
Pumping capacity .....	Up to 30 cc/rev single pump <b>(*)</b> Up to 4,8 x2 cc/rev double pump <b>(*)</b>
Melting rate .....	Up to 165 kg/h <b>(*)</b>
Number of pumps .....	1 single pump or 1 double pump 2 single pumps up to 8 cc/rev
Number of hydraulic outputs .....	2 per pump (3/4" UNF thread)
Number of electric outputs .....	Up to 4 outputs (1200W per output)
Motor power .....	375 W / 1.1 kW according to type of pump
Speed .....	7-100 rpm (10-80 rpm recommended)
Temperature range .....	40 to 200 °C
Temperature control .....	RTD ±0,5 °C (±1°F)
Maximum power pressure .....	85 bar (recommended less than 70 bar)
By- pass valve .....	Pneumatic (manual regulation)
Maximum power supply (at 230VAC) .....	24.975 W (1 single pump/ 2 outputs)
External functions .....	Temperature ok output Empty drum output Standby input Motor start-stop external control Motor speed external control
Electrical requirements .....	400V 3~ 50 Hz + N + PE
Options .....	Automatic air injection system for platen pulling out Automatic discharge of the circuit pressure By-pass valve automatic regulation Tower light with four colors

**(\*) According to adhesive type, platen type and working conditions**

## DIMENSIONS

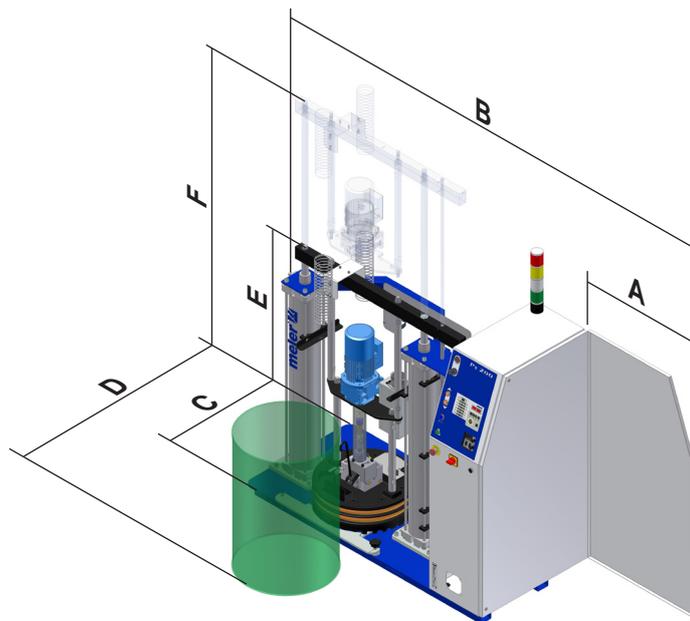

A: 800mm  
B: 2600mm  
C: 800mm  
D: 1400mm  
E: 1600mm  
F: 2600mm

**meler**   
GLUING SOLUTIONS

**Head Office**  
Pol. Los Agustinos, c/G, nave D-43  
E-31160 Orcoyen - Navarra - Spain  
Phone: +34 948 351 110  
Fax: +34 948 351 130  
email: info@meler.es

[www.meler.eu](http://www.meler.eu)

